

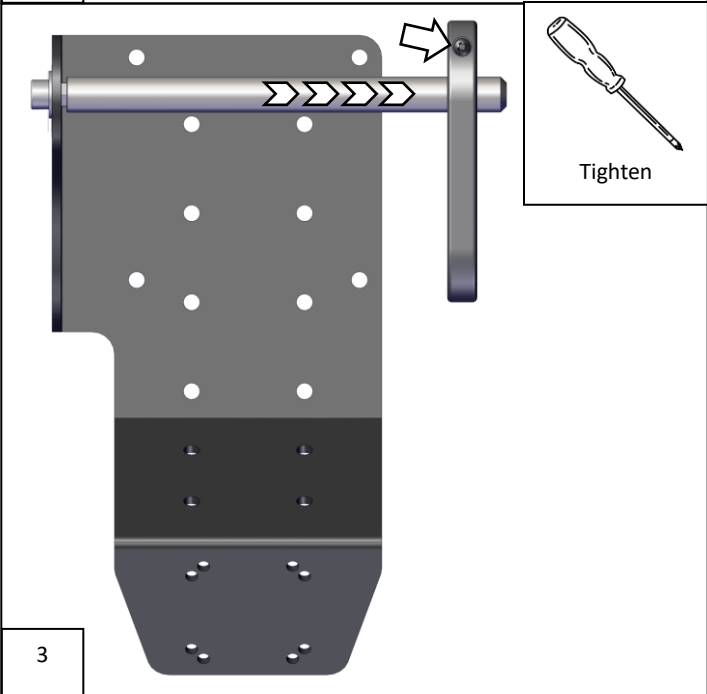
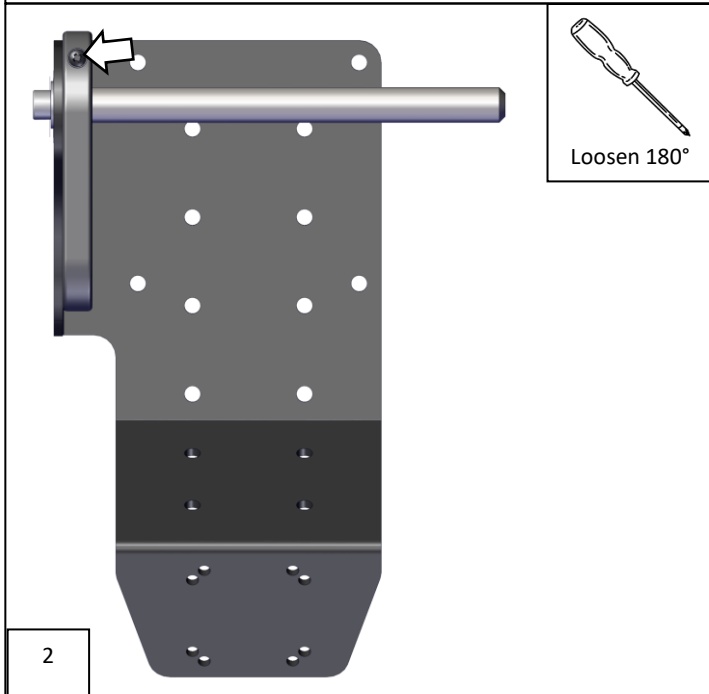


1

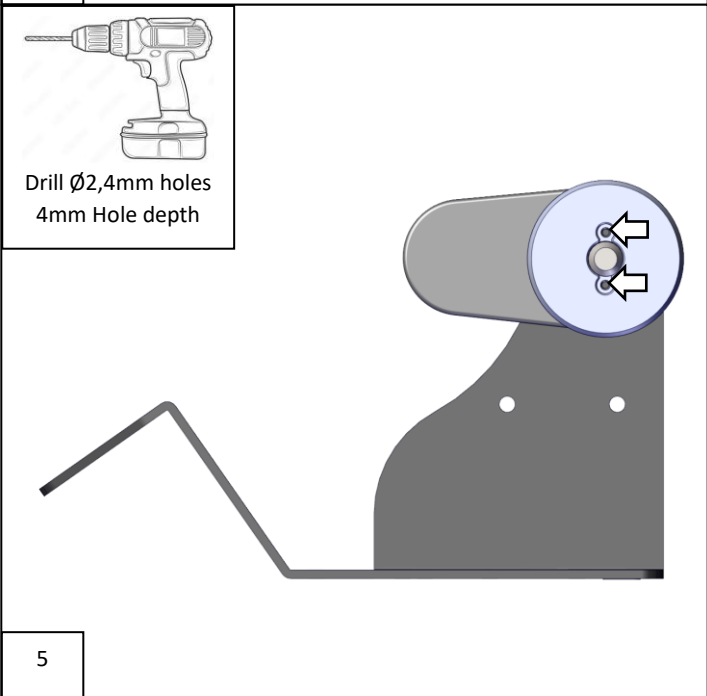







3

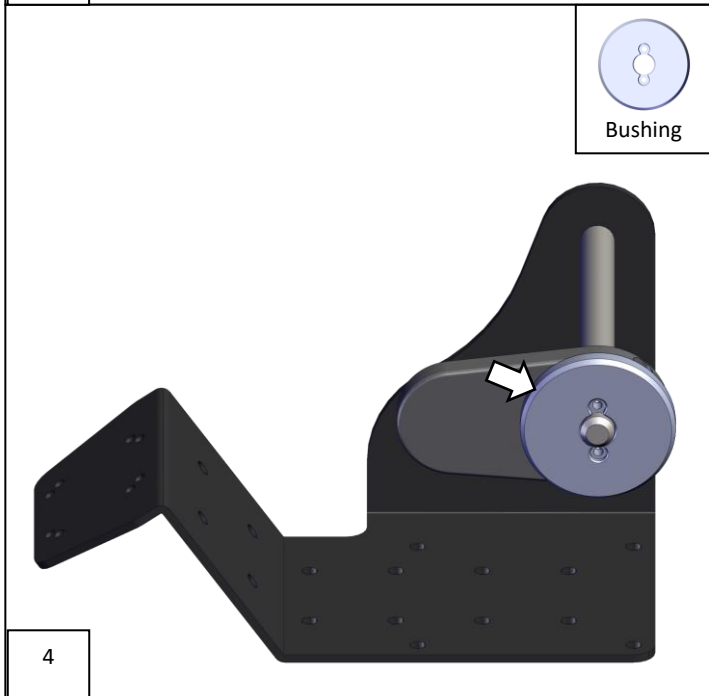

5


2

4

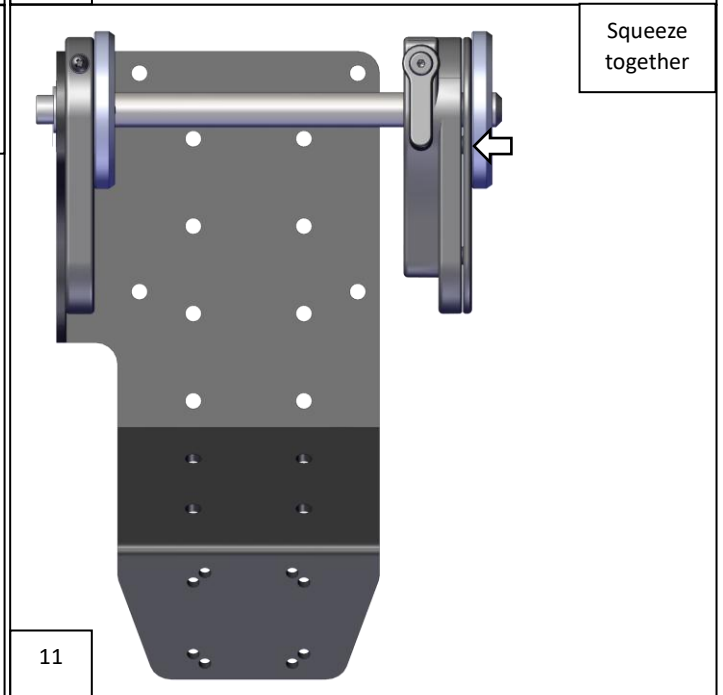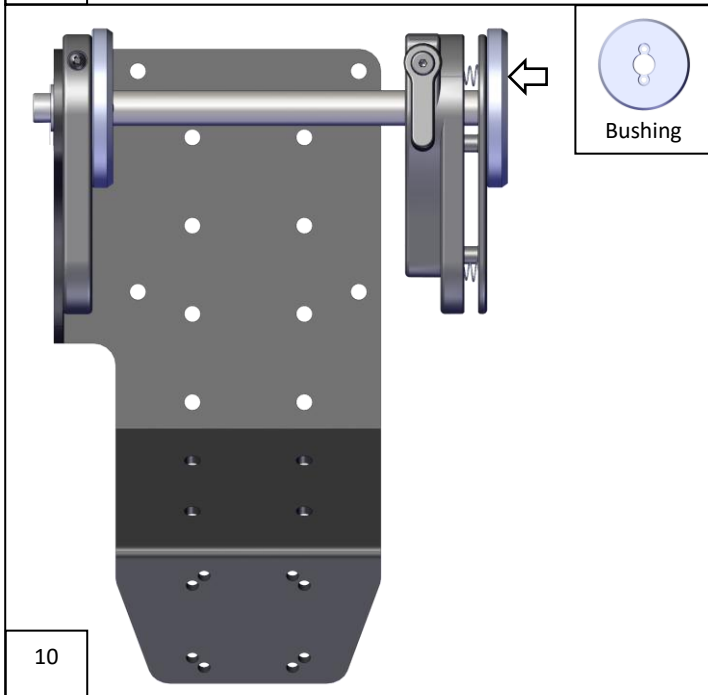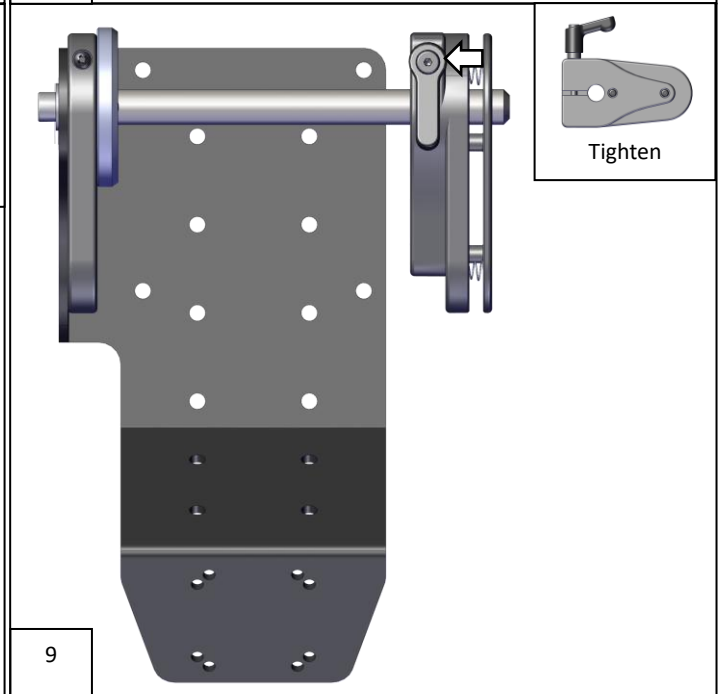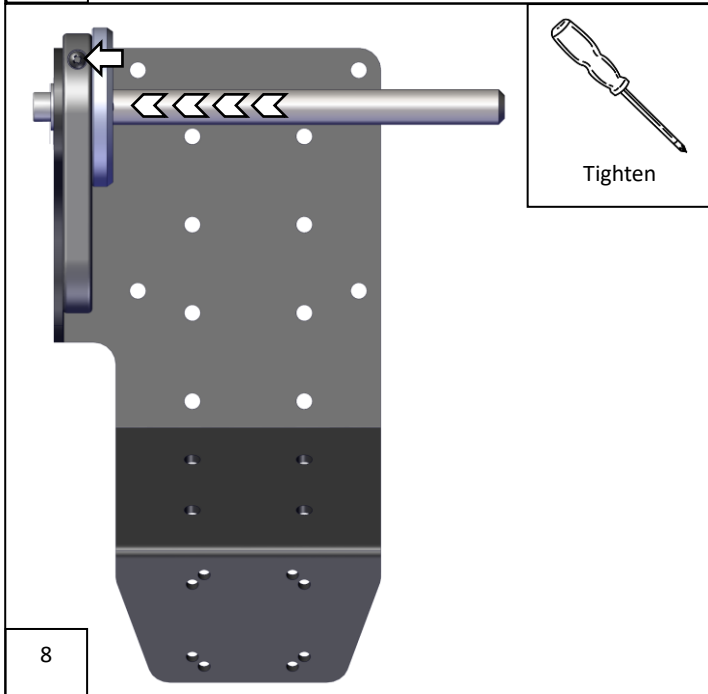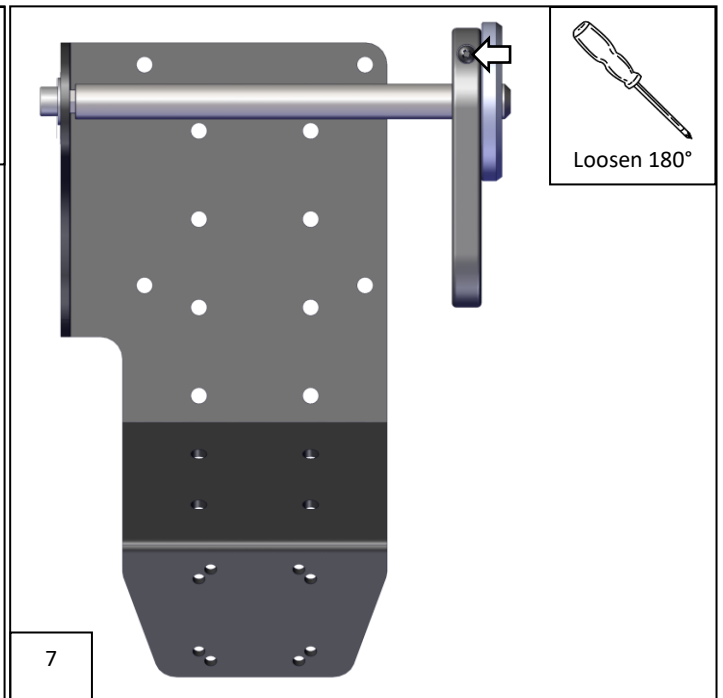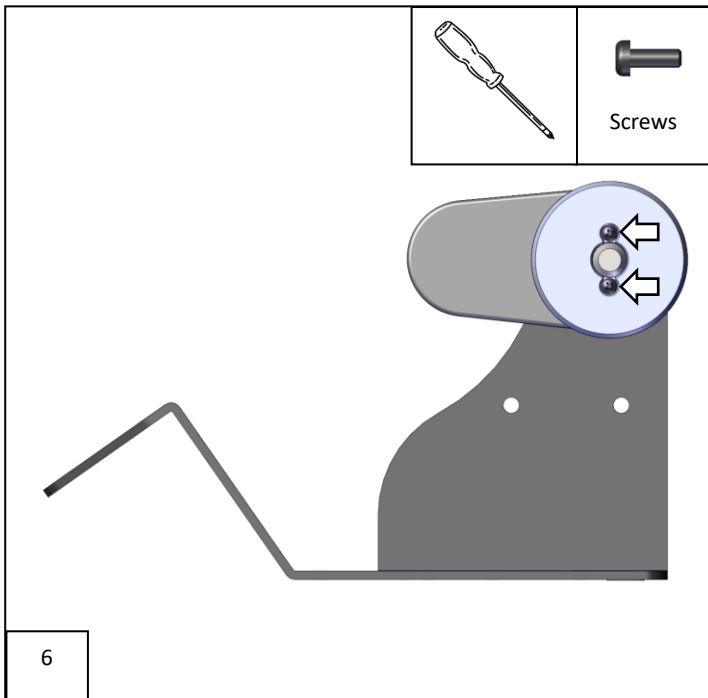





Drill $\varnothing 2,4\text{mm}$ holes
4mm Hole depth

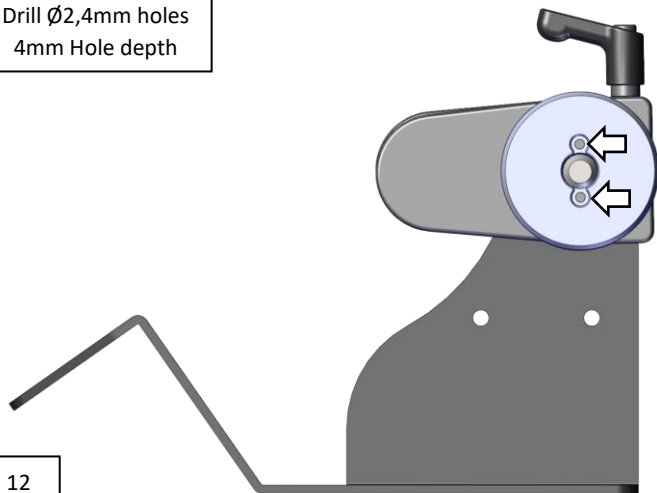


12



Screws

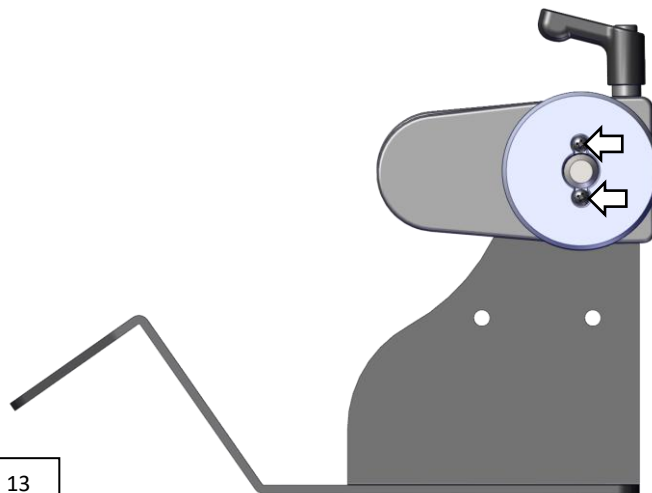


13

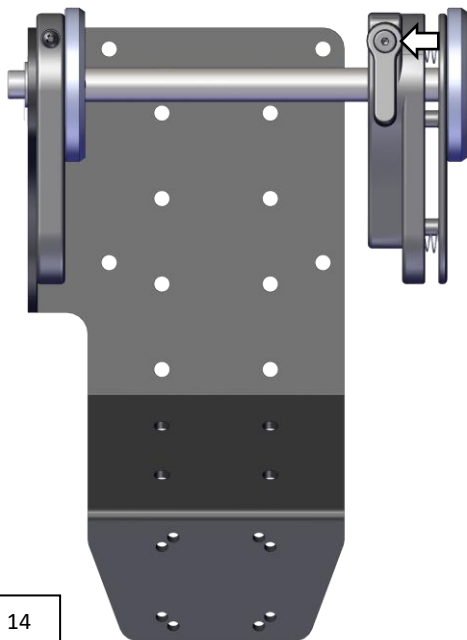


Loosen
&
rotate

14




Reattach

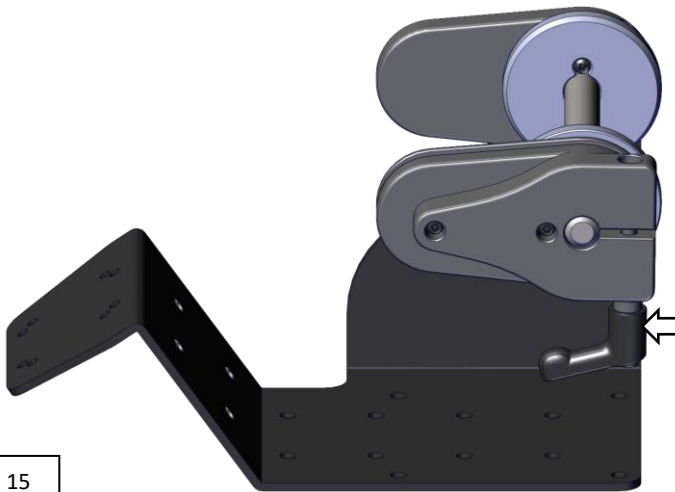

15

1. The reason the screw or lever is tightened is to prevent the pieces from rotating during screwing and drilling

2. The reason the pieces are rotated is to avoid drilling into the gap

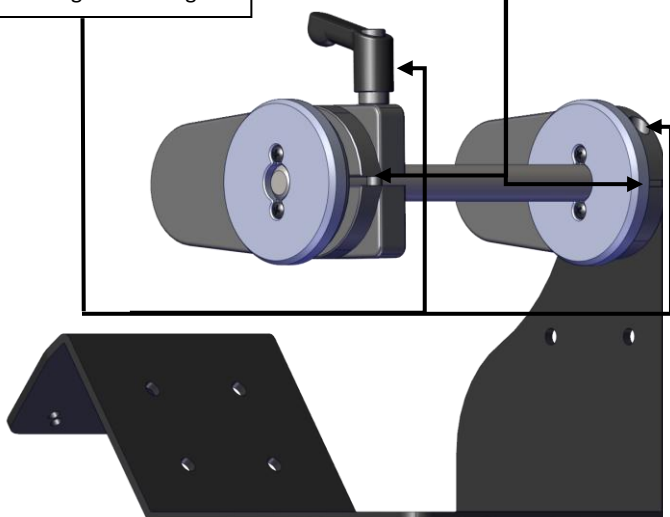

Finished

